

### Assembly and Installation Instructions for Model's

# 938300DW


## CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

**Warning** please make sure the electrical breaker is shut off before commencing with this installation

This fixture is certified for wall mounting only and is suitable for Wet locations when suitably caulked with silicon sealant.

| Package Contents |                                   |     |
|------------------|-----------------------------------|-----|
| Part             | Description                       | Qty |
| A                | Universal crossbar                | 1   |
| B                | J-Box mounting bolts              | 2   |
| C                | Fixture mounting bolts            | 2   |
| D                | Wire connectors                   | 3   |
| E                | Fixture assembly                  | 1   |
| F                | Silicon sealant (not supplied)    |     |
| G                | Fixture mounting washers and nuts | 2   |
| H                | Acrylic diffuser                  | 1   |
| I                | Acrylic mounting plate            | 1   |
| J                | Acrylic mounting plate knobs      | 2   |

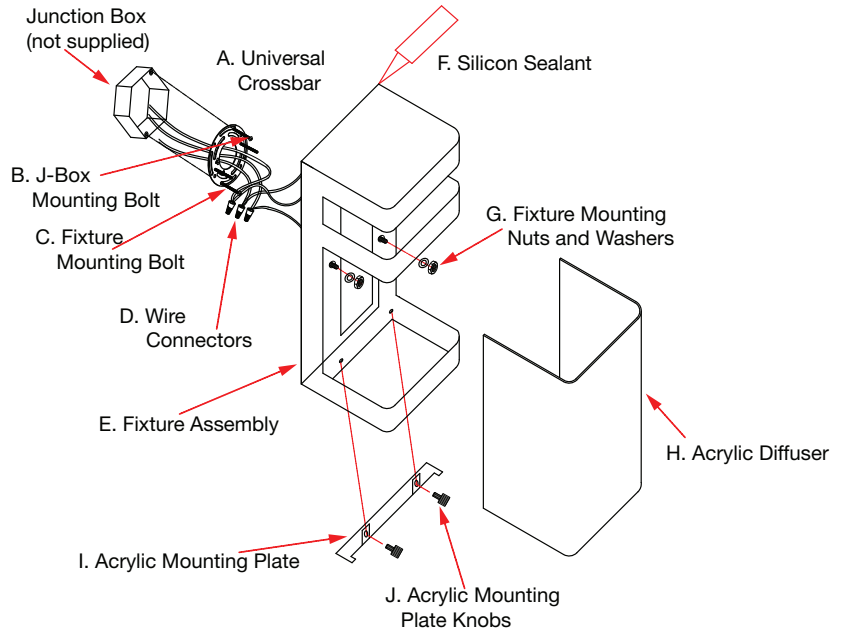

### Installing the fixture *please ensure the electrical breaker is switched off before commencing*

- 1 Attach and the Universal crossbar (A) to the Junction box with supplied J-Box mounting bolts (B). making sure that the two Fixture mounting bolts (C) are facing outwards. Feed the supply wires through the center of the Universal crossbar.
- 2 Connect the Supply wires to the Fixture wires using the supplied Electrical wire connectors (D). White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the Electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical
- 3 Attach the Fixture assembly (E) by inserting the two Fixture mounting bolts attached to the Universal crossbar, through the holes at the rear of the Fixture assembly (A) and secure with supplied Fixture mounting washers and nuts (G). If used in Wet Locations please ensure that the fixture is well caulked with suitable Silicon sealant (F) around the back of the fixture.
- 4 Insert the Acrylic diffuser (H) by sliding the diffuser into the Fixture assembly from the bottom of the assembly (E)
- 5 Attach the Acrylic mounting plate (I) to the bottom of the fixture using the supplied Acrylic mounting plate knobs (J)
- 6 Reconnect the electrical breaker and the fixture is ready for use.

